


Drilling rig

# CS-1200

Sobieski

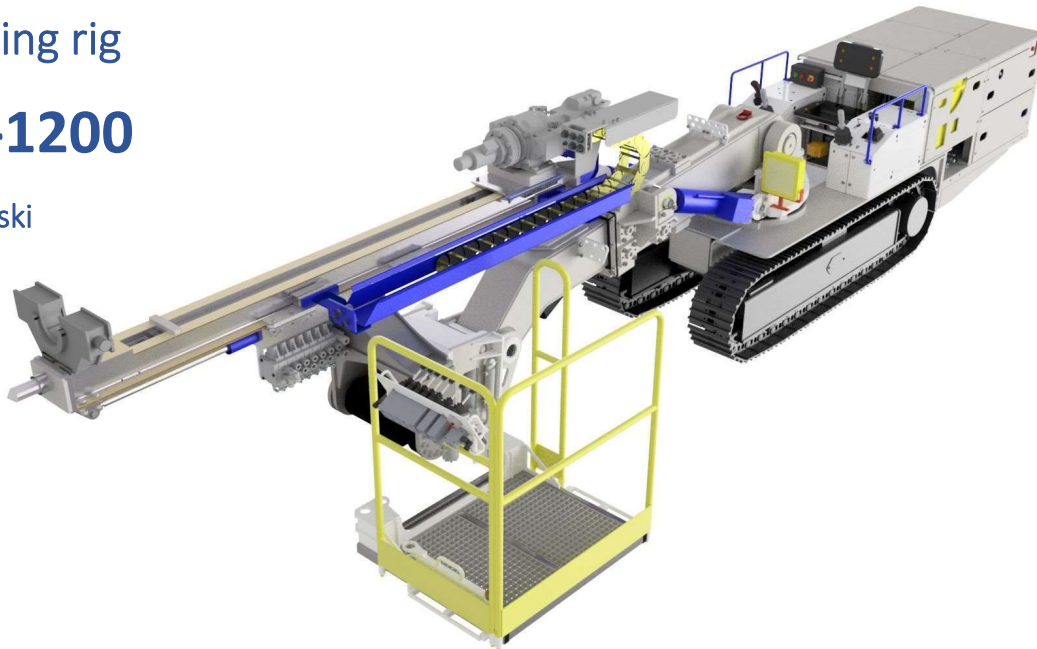

General data	Dimensions (W x H x L)	1200 x 1250 x 8200 mm
	Weight	12000 kg
Boom	Telescopic extension	700 mm
	Quick coupling *	✓
	Mast swivel	360°
	Mast tilt	180°
Drilling mast	Extension	540 mm
	Hydraulic clamp	✓
	Switchable platform	✓
	Carriage travel	1900 mm
Drilling head	Rotation (1 <sup>st</sup> / 2 <sup>nd</sup> gear)	180 / 360 rpm
	Torque (1 <sup>st</sup> / 2 <sup>nd</sup> gear)	1760 / 880 Nm
	Hole diameter	Ø48- Ø76 mm
	Hole depth	max 50 m
Electric system	Motor output	55 kW
	Rated input voltage	500/1000 V (660/1140 V)

\* Auxiliary attachments: straight and side-dump bucket, impact hammer, cutter head

Drilling rig

## CSW-1200




General data	Dimensions (W x H x L)	1200 x 1600 x 9000 mm
	Weight	12000 kg
Boom	Telescopic extension	700 mm
	Mast swivel	360°
	Mast tilt	90°
Drilling mast	Extension	1000 mm
	Parallel movement	✓
	Hydraulic clamp	✓
	Centraliser	✓
	Anti-jamming	✓
	Carriage travel	2210 mm *
Drilling head	Power output	13 kW *
	Hole diameter	Ø43 mm
	Hole depth	max 12 m
Electric system	Motor output	55 kW
	Rated input voltage	500/1000 V (660/1140 V)

\* different values on demand

Drilling rig

## CS-W1200

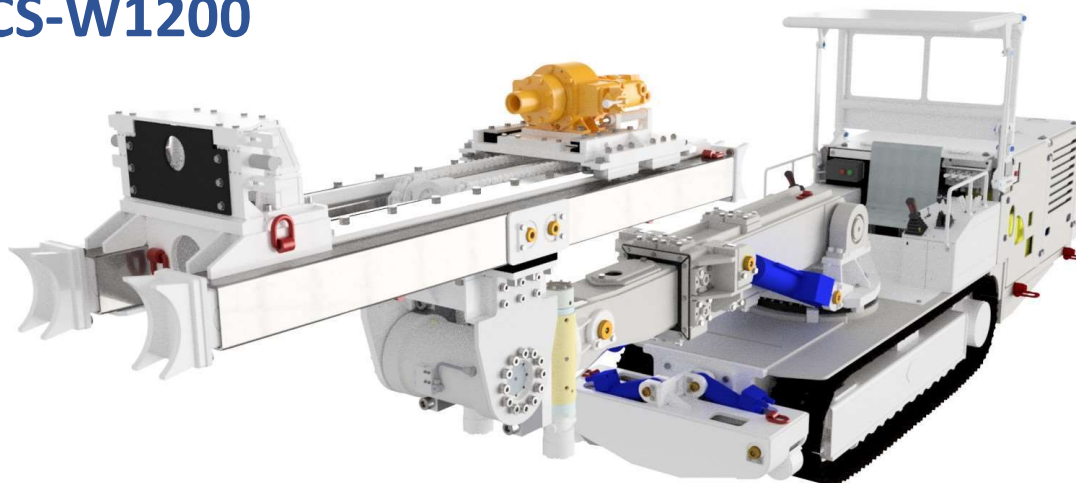

General data	Dimensions (W x H x L)	1250 x 2100 x 7620 mm
	Weight	12500 kg
Boom	Telescopic extension	700 mm
	Mast swivel	360°
	Mast tilt	180°
	Hydraulic wrench	✓
	Carriage travel	1250 mm
	Floating carriage	✓
	Support jacks	4x 900 mm
Drilling head	Rotation (1 <sup>st</sup> / 2 <sup>nd</sup> gear)	72 / 144 rpm
	Torque (1 <sup>st</sup> / 2 <sup>nd</sup> gear)	4400 / 2200 Nm
	Feed force	100 kN
	Hole diameter	max Ø250 mm
	Hole depth	max 300 m
Electric system	Motor output	55 kW
	Rated input voltage	500/1000 V (660/1140 V)